



# Naked Cable

## Technical Specifications & Data

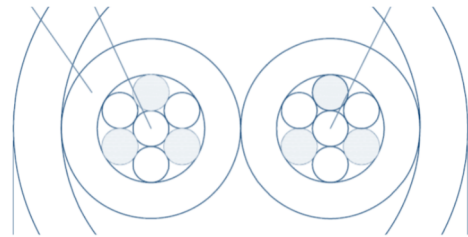

### CRYSTALROLL II (Hybrid Speaker Cable)

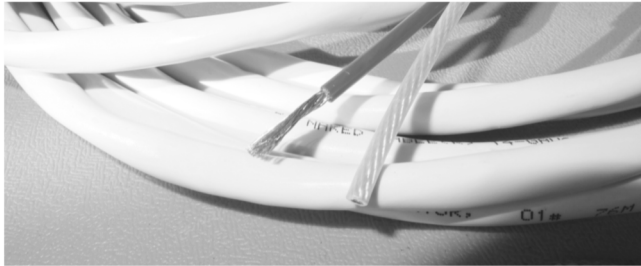

### Short Description

Naked Cable's Crystal speaker cable is manufactured using high quality materials in an ISO approved factory. The cable features premium grade oxygen free copper (C10100), a clustered conductor construction design along with a twisted construction for noise rejection. A PE dielectric with CM CL3 rated insulator for Custom Installation. The outer insulation is finished in a room friendly 'off white'.

### Details

- 1 pair 14 gauge/1.63mm diameter (2.08mm<sup>2</sup>)
- Flexible polyethylene inner insulation
- Anti-static PE outer insulation
- Colour-coding for easy ID of cable polarity
- 7 x clustered conductors per cable
- High performance
- Finished in interior friendly 'warm grey'

### Conductor Composition / Insulation (Dielectric)

<b>Design:</b>	Twin conductor format
<b>Conductor:</b>	14-gauge/1.63mm Premium grade C10100 OFC, 7 clusters of 26 copper strands
<b>Insulator (s):</b>	2 levels of insulation material, inner insulator diameter 3mm, outer diameter 7.4mm
<b>Shielding:</b>	Twisted construction

### Electrical Detail

<b>Impedance:</b>	16 ohms	<b>Capacitance:</b>	310 p/m
<b>Conductor:</b>	2 x	<b>Shielding:</b>	Twisted construction
<b>Compliance:</b>	CM CL3	<b>Additional:</b>	Meter marked, descending meters

### Product Detail

<b>Size:</b>	7.4mm diameter	<b>Colour:</b>	Pantone Warm Grey
<b>Weight:</b>	7.0kg (approx.)	<b>Braid Colour:</b>	N/A
<b>Carton:</b>	76m length, Plastic spool	<b>UL Rating:</b>	N/A



Please note: Naked Cable makes every effort to ensure that these details are correct, but from time to time may change the final specification without notice. As such, these specifications are supplied 'as is' with no warranties expressed or implied.