



THTR60 Series Composer Collection

The Theater Collection uses larger woofers and midrange drivers than any design we have engineered before. Quad six and a half inch drivers partner with our patented DPSD 1" tweeter to deliver the accuracy and sonic linearity that was once only reserved for the worlds finest box speakers. We are proud of our Theater Collection and know they will exceed the most critical expectations.



THTR69



THTR67

DPSD™ Tweeter

This patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

Woofer Cone Materials

Designed from the ground up, we only use the finest materials for our woofers to ensure optimal performance in response with speed and precision.

Compression Molded Baskets

These complex baskets that support the woofer cones were computer designed and compression molded with absolute precision allowing for unique support and venting elements to assure peak performance.

EQ Adjustment

These switches on the baffle allows the adjustment of the output of either the high frequencies or both high and low frequencies to custom tailor the sound based on the proximity of the architectural elements of the room.

Tool-less Mounting System


The Spring-Lock™ mounting dogs are spring loaded and require only a twist with a thumbnail to have them snap easily and securely into place.


X-Wave[™] Woofer Surround

This suspension element absorbs unwanted frequencies that reflect up and down the woofer cone to reduce harmonic distortion while maintaining the desired linear travel of the woofer.

Specifications

| Model | THTR69 | THTR67 |
|--------------------|--------------------------------|--------------------------------|
| Part Number | SWML30900 | SWML30700 |
| Woofer Cone | Kevlar | Glass Fiber |
| Woofer Dimensions | 6.5" (165mm) | 6.5" (165mm) |
| Tweeter Dome | Silk DPSD | Silk DPSD |
| Tweeter Diameter | 1" (25mm) | 1" (25mm) |
| Frequency Response | 40 Hz - 20 kHz | 40 Hz - 20 kHz |
| Impedance | 6 ohm Minimum | 6 ohm Minimum |
| Power Handling | 10 - 200 Watts | 10 - 200 Watts |
| Dimensions | 8.67 x 29.85" (220 x 758mm) | 8.67 x 29.85" (220 x 758mm) |
| Grille Dimensions | 9.11 x 30.29" (231 x 769mm) | 9.11 x 30.29" (231 x 769mm) |
| Cutout Dimensions | 7.875 × 29" (198 × 736mm) | 7.875 x 29" (198 x 736mm) |
| Mounting Depth | 3.78" (96mm) | 3.78" (96mm) |

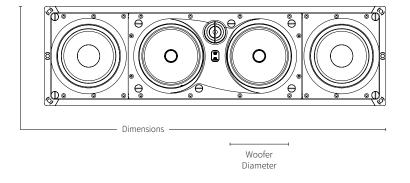



Mounting Depth

*Not to Scale