


# MHUB Music Input Adapter

Add an audio source to MHUB or MHUB S (A) systems.

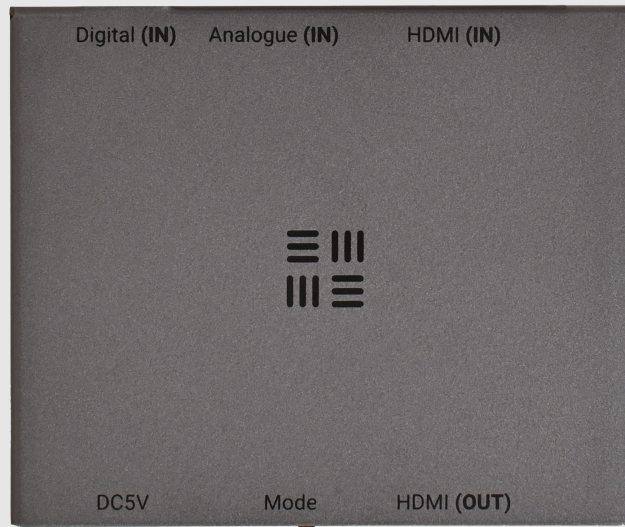

Product Code(s):

**2.58.936**

INPUTS / OUTPUTS

**3 / 1**

**Converts video inputs to audio inputs on MHUB / MHUB S (A)**

**Embeds digital or stereo audio on HDMI**

**Optical formats: PCM 2.0, Dolby Digital 2.0/5.1, DTS 2.0/5.1**

**Supports HDMI High Bit Rate (HBR) audio pass-through**

**HDCP 2.2**

**CEC pass through supported**

**2 year warranty**

The MHUB Music Input Adapter enables the addition of an audio-only input, such as a music streamer, audio mixer, microphone\*, public address system, chimes, etc, as one of the selectable sources as part of a standalone or stacked MHUB or MHUB S (A) multizone system.

Popular use cases would include adding a music source input such as a Sonos Port or door chime to a multizone system without requiring a separate audio matrix device.

\*Additional hardware may be required.  
MHUB Music Input Adapter  
2.58.936



### Form

Chassis W/H/D (mm)	73.5/60.7/17
Weight (g)	Chassis: 122 Package: 350
Material	Chassis: Steel
Colour	Carbonite (grey)
Operating temp	0°C - 40°C / 32°F - 104°F
Storage temp	-20°C - 60°C / -4°F - 140°F
Relative humidity	20 - 90% (Non-condensing)

### Technical

HDMI	2.0b
HDCP	2.2
Audio (input)	<b>HDMI (Type A)</b> Upto 5.1 PCM, Dolby/DTS 5.1 <b>Optical:</b> Upto 5.1 PCM, Dolby/DTS 5.1 <b>Stereo (3.5mm):</b> PCM
Audio (output)	<b>HDMI:</b> LPCM 2.0/2.1/5.1

### AV Input/Output

Video inputs	1 HDMI (Type A)
Video outputs	1 HDMI (Type A)
Audio inputs	1 3.5mm Stereo, 1 Optical
Audio outputs	1 HDMI (Type A)

### Other

Warranty	2
----------	---

# Wiring up.

**Model: MHUB Music Input Adapter** (Using the MHUB Music Input Adapter to add an audio source to MHUB or MHUB S (A) system.)

